
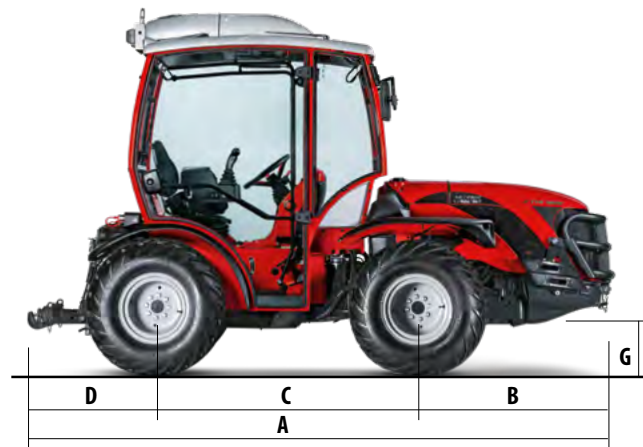
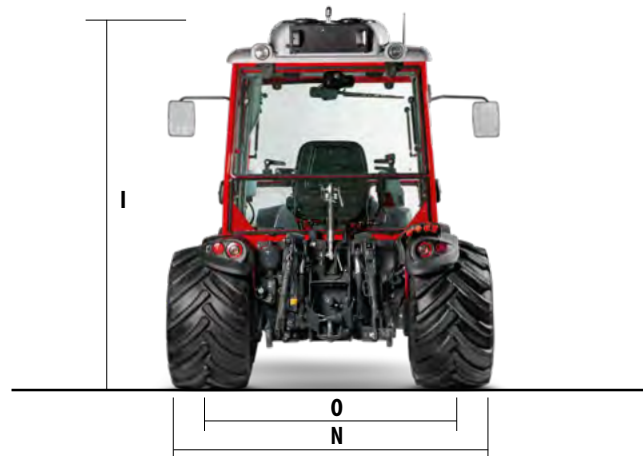


STANDARD EQUIPMENT

- Reversible driving position servo-assisted RGS™ system
- Front/rear differential lock, simultaneous or rear only, with electro-hydraulic control
- Controls mounted on turret
- Tilt-adjustable steering wheel with shuttle control
- Sprung, adjustable seat with seat belt
- Height adjustable rear tow hook
- Front tow hook
- Multifunctional digital console with display
- Battery
- Battery disconnecter
- Safe starting on shuttle, PTO and seat

- “Extra Comfort” monocoque closed metal cab, mounted on Silent Blocks, soundproofed, with openable windscreen, 2 worklights, heating system with dust filter, thermostat control, 3-speed blower, radiator and heat diffuser, air outlet vents at various points including screen demisting vents, electric windscreen wipers and screen wash pump, 2 rear-view mirrors, coat hook – predisposed for air conditioning system

- Front ballast (2+2 total 88 kg) • Front hydraulic lift complete with 3-point linkage + 1 replicated double-acting remote valve (2 front quick couplers) + 4 minicouplers • bull-bar • Italy trailer hitch slider clevis*
- Top link and rh lift rod + 2 double-acting remotes with minicouplers (4 quick couplers) all hydraulically adjustable from driving position via joystick • Pneumatic seat suspension with continuous driver weight adjustment up to 130kg • continuous height adjustment range of 80mm • SC" seat with armrests • gearbox with 540-1000 rpm PTO • ACS (Automatic Cleaning System) • "Superbrake" braking system • Raised top link hitch • High capacity hydraulic pump with unloading valve

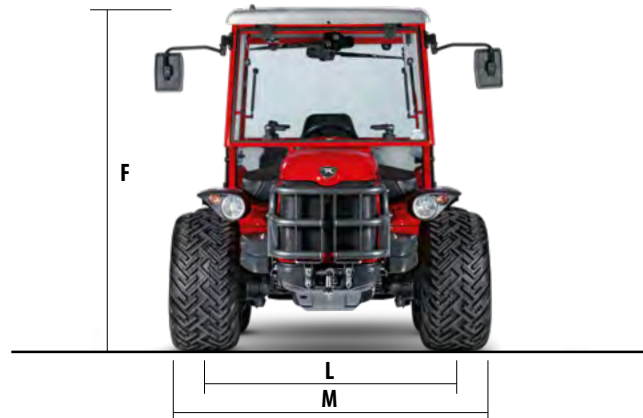

DIMENSIONS



	31x15,50-15 Terra	320/70 R18	33x15,50-15	400/55-17,5	19.0/45-17
E	395	309	395	400	465

Wheels	Dimensions (mm)										
Front/Rear	A	B	C	D	F	I	G	L	M*	N*	O
31x15,50x15	3485÷3620	1190	1595	700÷835	2140	2205	240	1840	1445	1840	1445
320/70 R18	3485÷3620	1190	1595	700÷835	2185	2243	285	1685	1376	1685	1376
33x15,50-15	3485÷3620	1190	1595	700÷835	2150	2224	250	1840	1445	1840	1445
400/55 -17,5	3485÷3620	1190	1595	700÷835	2185	2242	285	1835	1440	1835	1440
19.0/45-17	3485÷3620	1190	1595	700÷835	2185	2230	285	1925	1460	1925	1460

*Min. external width.

